Installation & Configuration


Easy Text-to-Speech · https://handyplugins.co/docs/easy-text-to-speech-installation-configuration/

Once you purchase the plugin, you will be able to download it on your "my account" page. Install and activate plugin as any other WordPress plugins and then enter the license key.


Amazon Polly Credentials

Create an IAM user with giving Polly readonly access. And enter the public key and secret key on the plugin settings page.


Step 1: Create IAM user

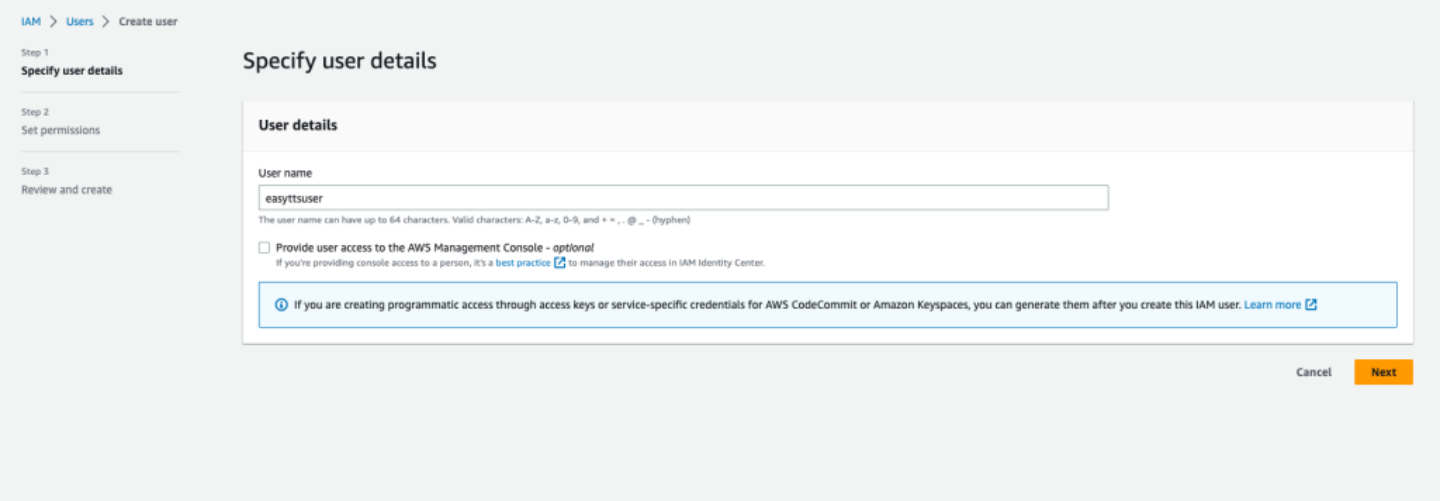


Step 2: Attach the Policy

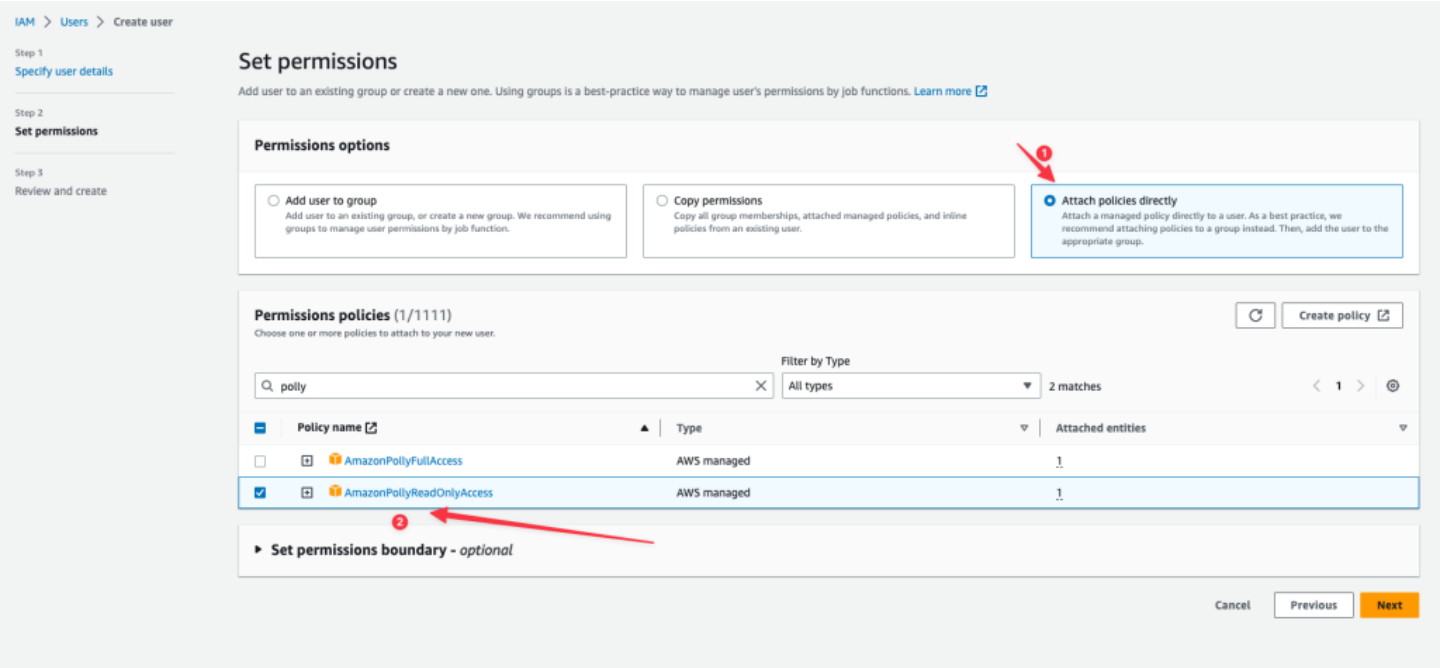


Step 3: Review and Create the User

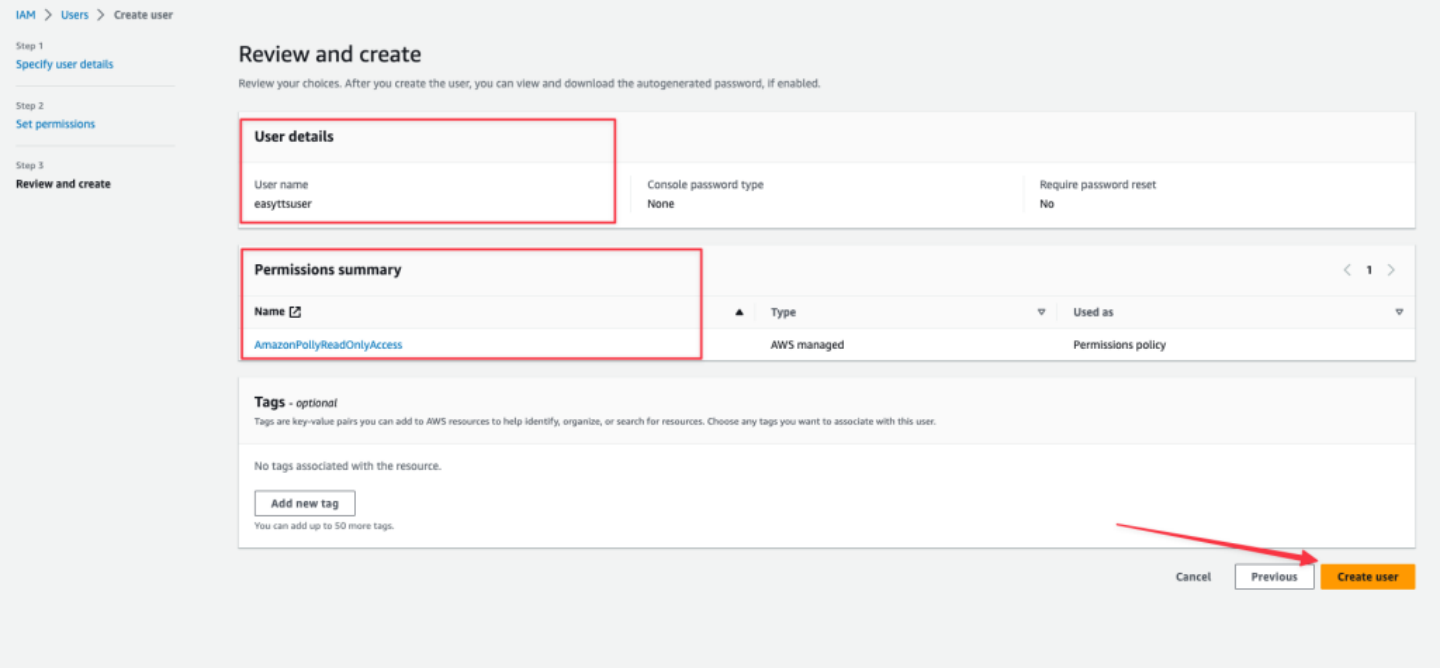


Step 4: Create Access Key for the User

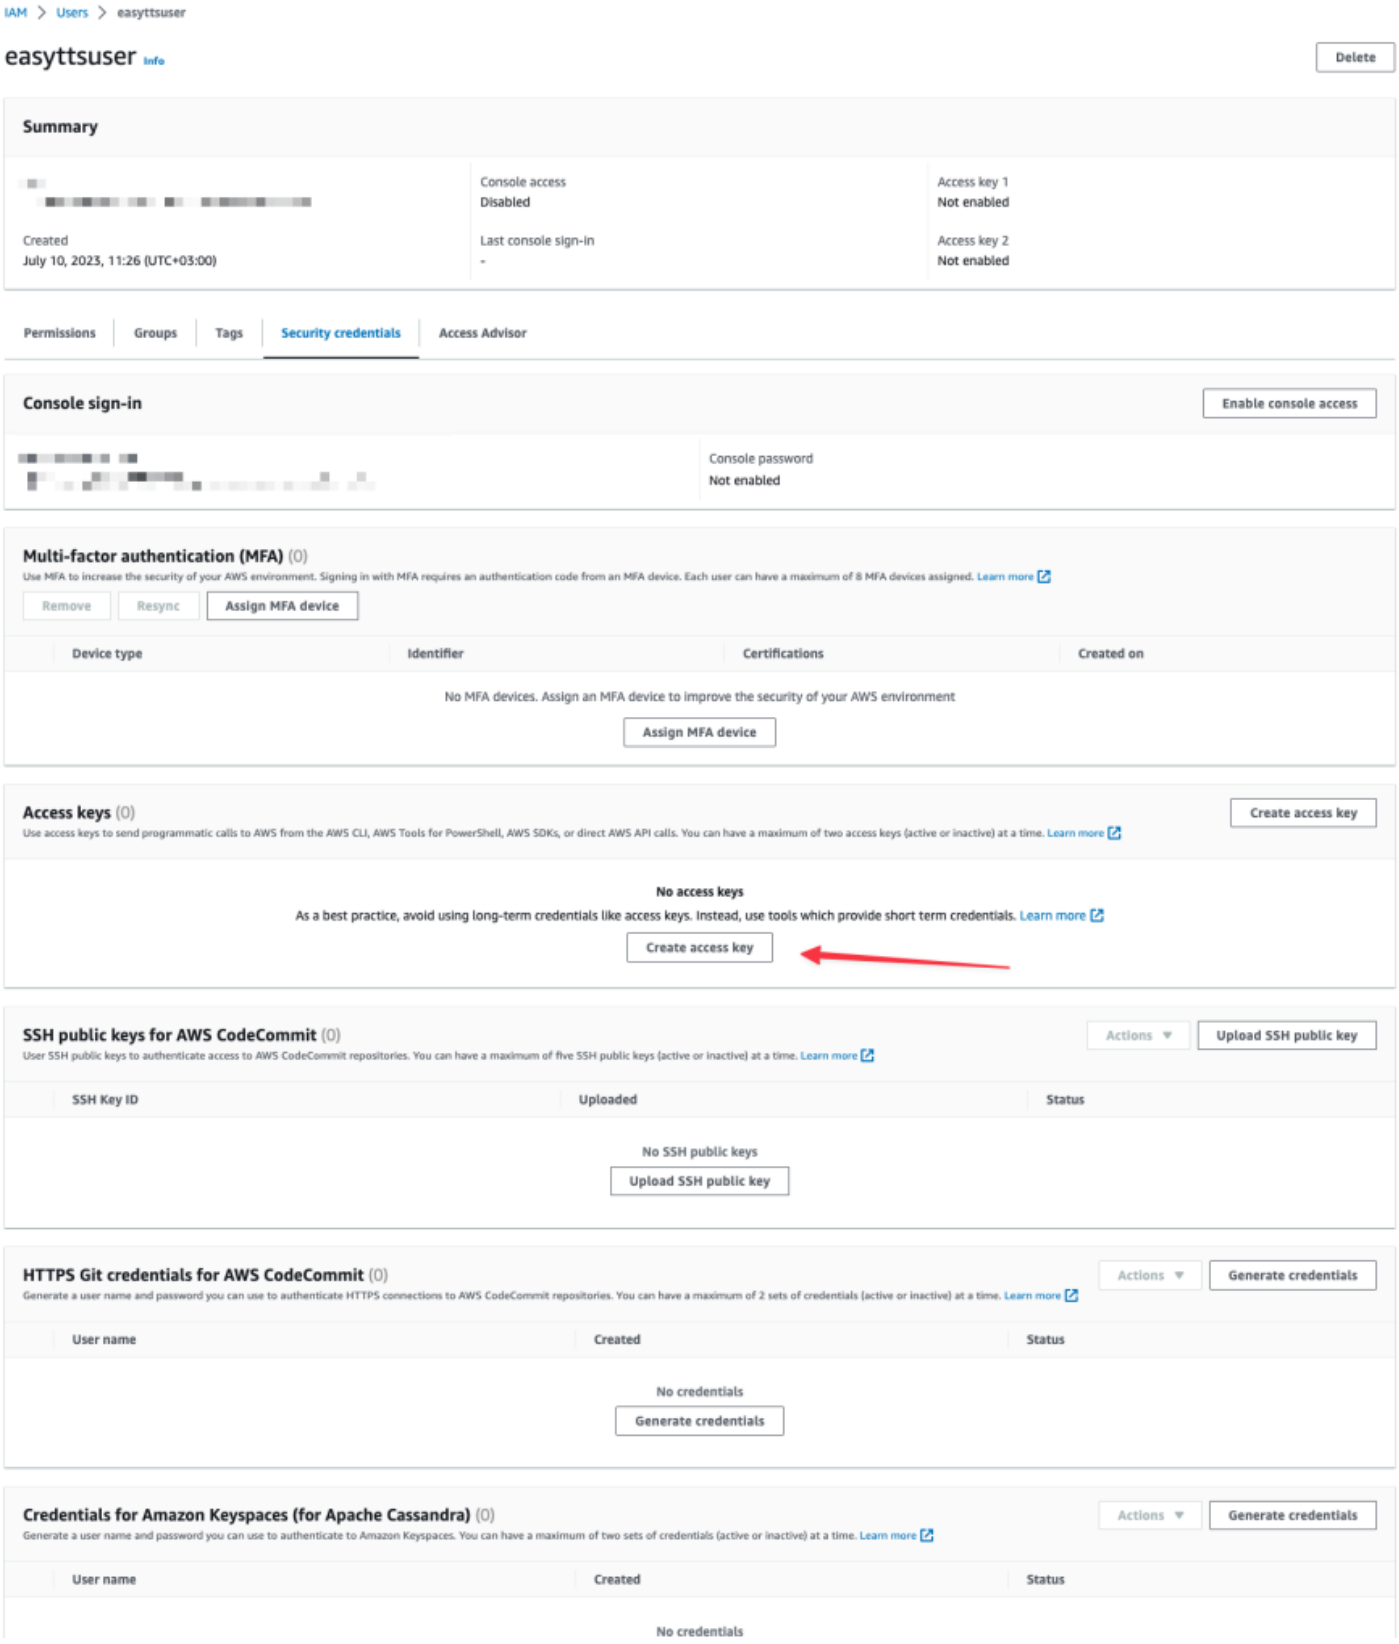
IAM > Users > easyttsuser
easyttsuser Info
Delete
Summary
Console access
Disabled
Access key 1
Not enabled
Created
July 10, 2023, 11:26 (UTC+03:00)
Last console sign-in
-
Access key 2
Not enabled
Permissions
Groups
Tags
Security credentials
Access Advisor
Console sign-in
Enable console access
Console password
Not enabled
Multi-factor authentication (MFA) (0)
Use MFA to increase the security of your AWS environment. Signing in with MFA requires an authentication code from an MFA device. Each user can have a maximum of 8 MFA devices assigned. Learn more
Remove
Resync
Assign MFA device
Device type
Identifier
Certifications
Created on
No MFA devices. Assign an MFA device to improve the security of your AWS environment
Assign MFA device
Access keys (0)
Use access keys to send programmatic calls to AWS from the AWS CLI, AWS Tools for PowerShell, AWS SDKs, or direct AWS API calls. You can have a maximum of two access keys (active or inactive) at a time. Learn more
Create access key
No access keys
As a best practice, avoid using long-term credentials like access keys. Instead, use tools which provide short term credentials. Learn more
Create access key
SSH public keys for AWS CodeCommit (0)
User SSH public keys to authenticate access to AWS CodeCommit repositories. You can have a maximum of five SSH public keys (active or inactive) at a time. Learn more
Actions
Upload SSH public key
SSH Key ID
Uploaded
Status
No SSH public keys
Upload SSH public key
HTTPS Git credentials for AWS CodeCommit (0)
Generate a user name and password you can use to authenticate HTTPS connections to AWS CodeCommit repositories. You can have a maximum of 2 sets of credentials (active or inactive) at a time. Learn more
Actions
Generate credentials
User name
Created
Status
No credentials
Generate credentials
Credentials for Amazon Keyspaces (for Apache Cassandra) (0)
Generate a user name and password you can use to authenticate to Amazon Keyspaces. You can have a maximum of two sets of credentials (active or inactive) at a time. Learn more
Actions
Generate credentials
User name
Created
Status
No credentials


Step 5

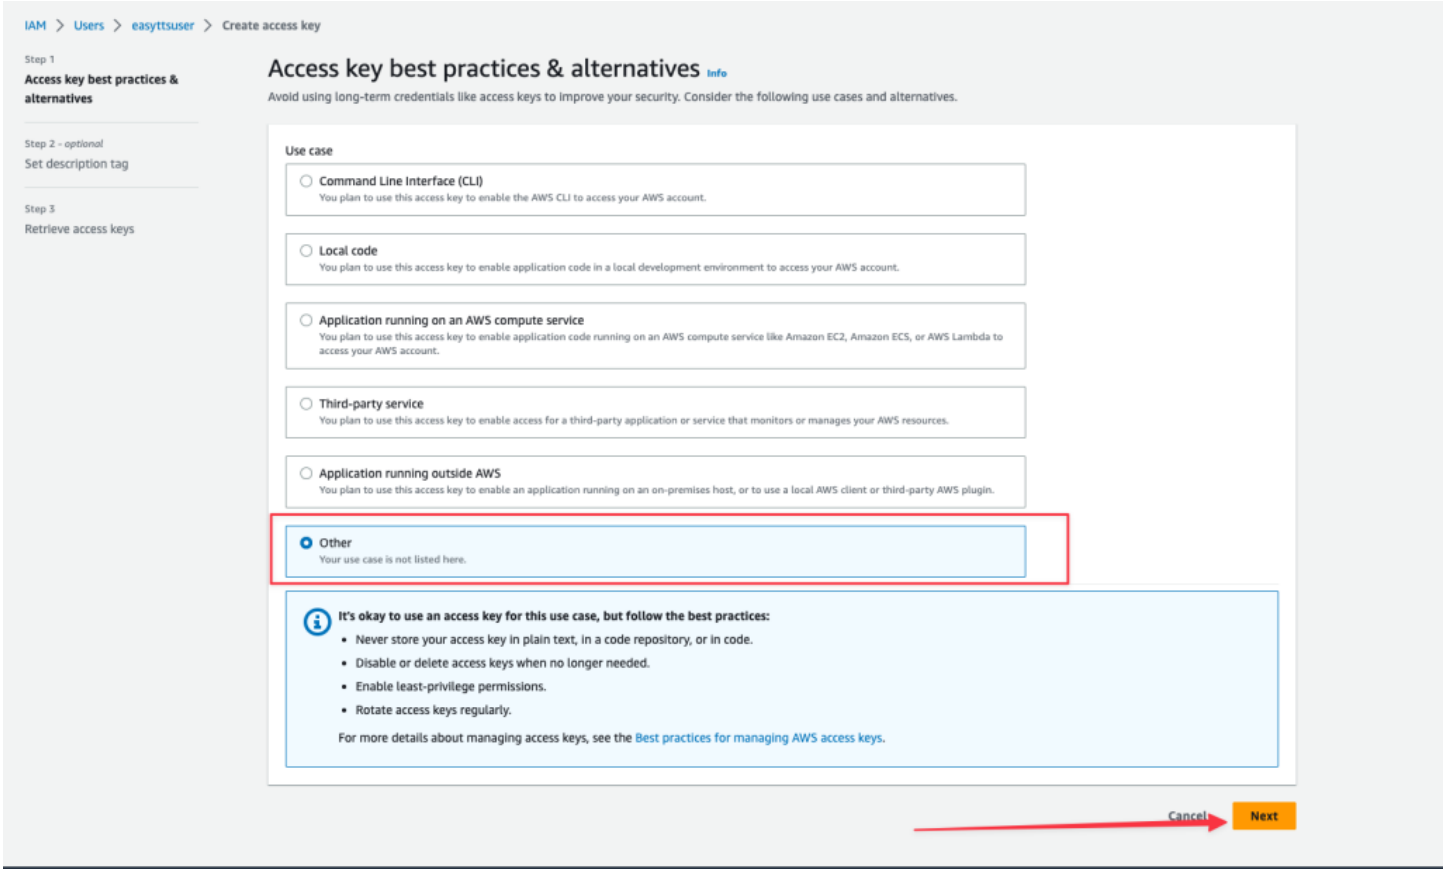


Step 6: Set description tag (optional)

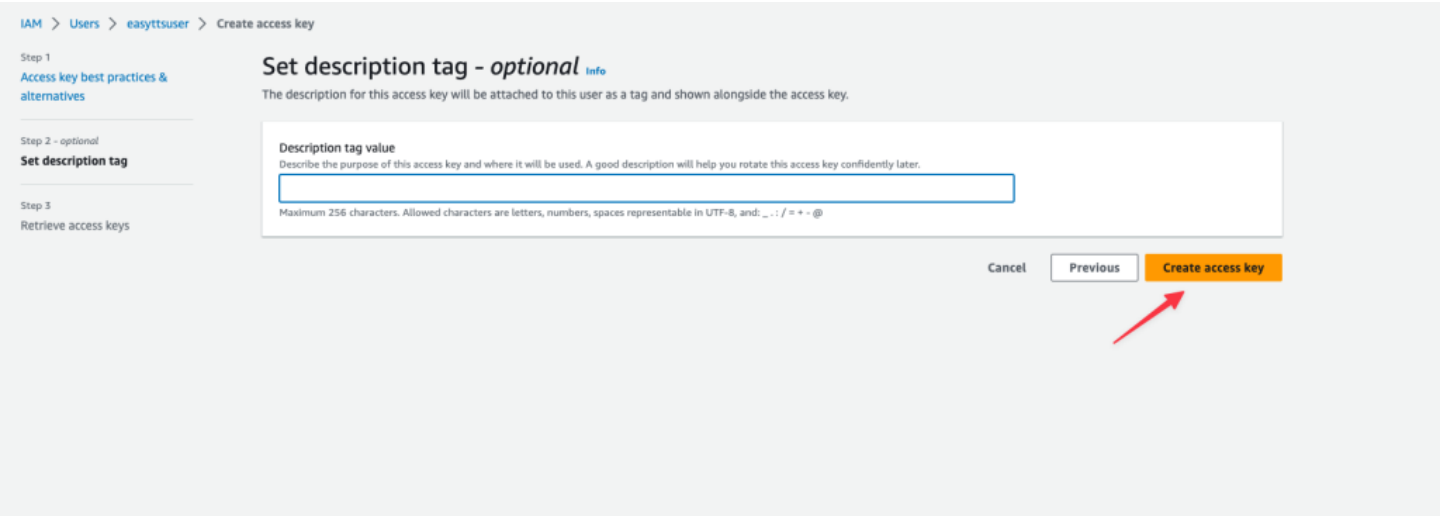

Step 7: Retrieve access keys

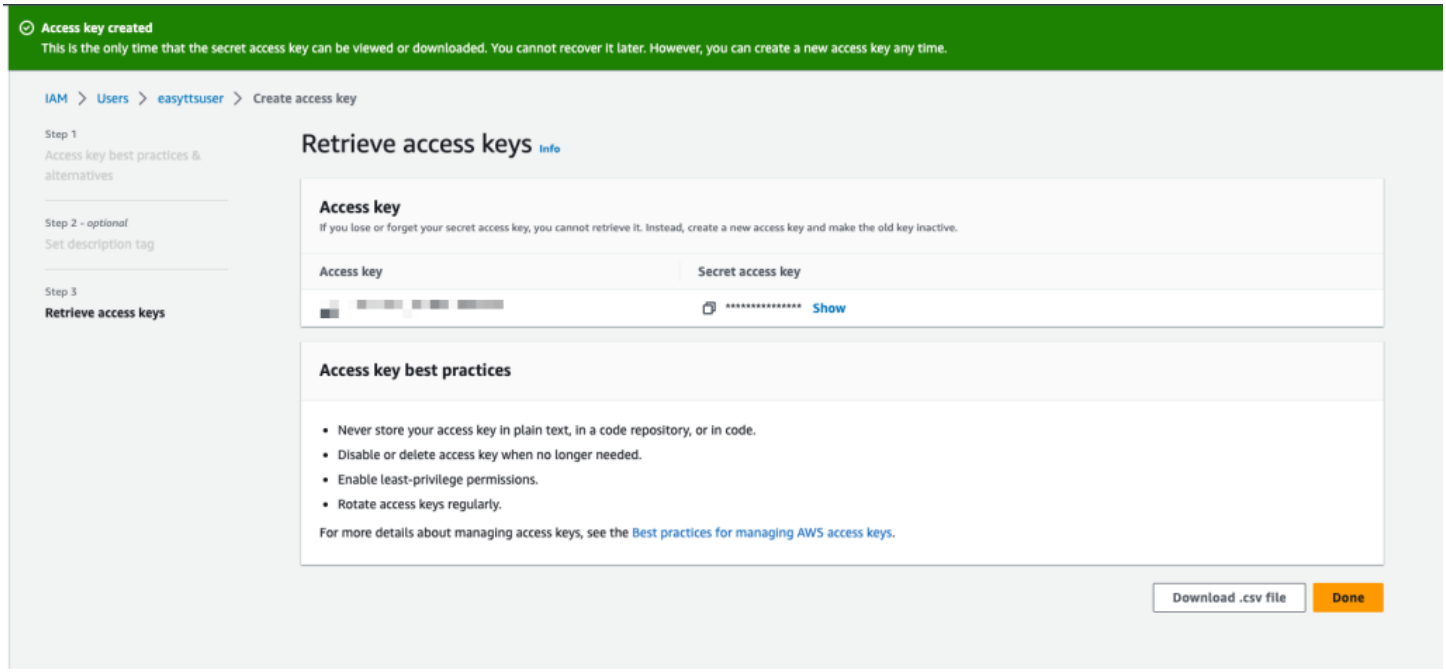

Once you created access key, then enter the credentials on the plugin settings page

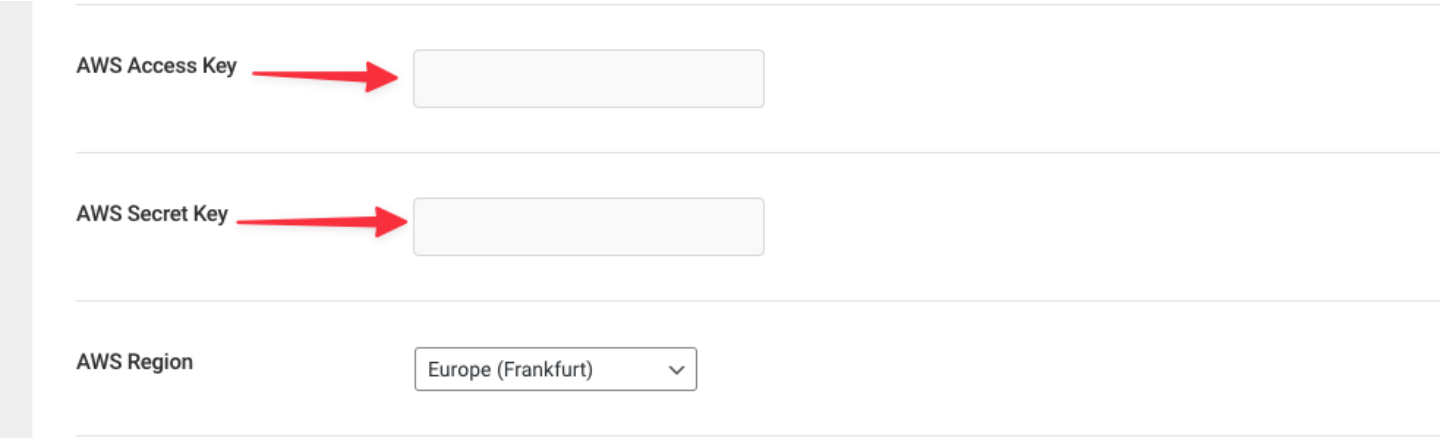

That's it, now you are ready to create voices and convert texts into the speeches.